



Sequencer 2Q

by



Electronic module for control panel Control and exchanger for 2 electro - pumps

THIS DEVICE ALLOWS TO MAKE A CONTROL PANEL FOR AUTOCLAVE BY ONLY ADDING CONTACTORS AND THERMIC RELAYS.
IT CONSISTS OF A BASE UNIT SUITABLE FOR DIN GUIDE AND OF A PANEL CONTAINING TWO SWITCHES FOR PUMP OPERATION AND SEVEN LED DIODES THAT ALWAYS SHOW THE AUTOCLAVE STATUS.

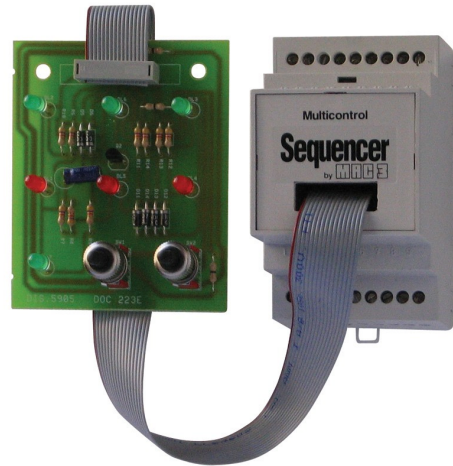

General features - Cod. TMK32Q2400

- Electronic control for mounting on DIN guide (3 modules)
- Power supply 24 V ~ 50/60Hz 3 W
- Sequence exchanger and control for motor starting
- Operating temperature -5 ÷ + 40°C
- Panel dimensions h/w/d in mm. 71 x 87 x 20
- n° 1 input at 24 Vac for minimum level float switch
- n° 2 input at 24 Vac for work and emergency pressure switch
- Panel with:
 - Selectors for: automatic / off / manual operation
 - Lighting led: n° 2 operating motor - n° 2 protected motor - n° 1 main pilot - n° 1 min water level alarm - n° 1 for pressure switches

